

P/N: 62513-0102

Copyright

© 2015, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: 62513-0102

Release:

Commit: 26732

Language: en-US

Modified: 2015-06-12

Formatted: 2015-10-16

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



General description

The FLIR A65 has features and functions that make it the natural choice for anyone who uses PC software to solve problems and for whom 640 × 512 pixel resolution is sufficient.

Among its main features are GigE Vision and GenICam compliance, which makes it plug-and-play when used with software packages such as IMAQ Vision and Halcon.

Key features:

- Very affordable.
- Compact (40 mm × 43 mm × 106 mm).
- GigE Vision and GenICam compliant.
- GigE Vision lockable connector.
- PoE (power over Ethernet).
- 8-bit 640 × 512 pixel images streamed at 7.5 Hz, signal linear
- 14-bit 640 × 512 pixel images streamed at 7.5 Hz, signal and temperature linear
- Synchronization between cameras possible.
- 1x+1x GPIO.
- Compliant with any software that supports GenICam, including National Instruments IMAQ Vision, Stemmers Common Vision Blox, and COGNEX Vision Pro.

Typical applications:

- Automation and thermal machine vision.
- Entry level "high-speed" R&D.

Imaging and optical data

IR resolution	640 × 512 pixels
Thermal sensitivity/NETD	< 0.05°C @ +30°C (+86°F) / 50 mK
Field of view (FOV)	45° × 37°
Focal length	13 mm (0.5 in.)
Spatial resolution (IFOV)	1.31 mrad
F-number	1.25
Image frequency	7.5 Hz
Focus	Fixed

Detector data

Detector type	Focal plane array (FPA), uncooled VOX microbolometer
Spectral range	7.5–13 μm
Detector pitch	17 μm
Detector time constant	Typical 12 ms

P/N: 62513-0102

© 2015, FLIR Systems, Inc.

#62513-0102; r. /26732; en-US

Measurement	
Object temperature range	–25 to +135°C (–13 to 275°F)
Accuracy	±5°C (±9°F) or ±5% of reading
Measurement analysis	
Atmospheric transmission correction	Automatic, based on inputs for distance, atmospheric temperature and relative humidity
Optics transmission correction	Automatic, based on signals from internal sensors
Emissivity correction	Variable from 0.5 to 1.0
Reflected apparent temperature correction	Automatic, based on input of reflected temperature
External optics/windows correction	Automatic, based on input of optics/window transmission and temperature
Measurement corrections	Global object parameters
Ethernet	
Ethernet	Control and image
Ethernet, type	Gigabit Ethernet
Ethernet, standard	IEEE 802.3
Ethernet, connector type	RJ-45
Ethernet, communication	GigE Vision ver. 1.2 Client API GenICam compliant
Ethernet, image streaming	8-bit monochrome @ 7.5 Hz <ul style="list-style-type: none"> • Signal linear/ DDE • Automatic/ Manual • Flip H&V 14-bit 640 × 512 pixels @ 7.5 Hz <ul style="list-style-type: none"> • Signal linear/ DDE • Temperature linear GigE Vision and GenICam compatible
Ethernet, power	Power over Ethernet, PoE IEEE 802.3af class 0 Power
Ethernet, protocols	TCP, UDP, ICMP, IGMP, DHCP, GigEVision
Digital input/output	
Digital input, purpose	General purpose
Digital input	1× opto-isolated, “0” <2, “1” = 2–12 VDC. <div> <div>NOTE</div> <p>Maximum input 12 VDC. If the input is above 12 VDC without a resistor in series there is a risk of damaging the input. If the input is 24 VDC use a 1.2 kΩ resistor in series. In that case “1” = 3–24 VDC.</p> </div>
Digital output, purpose	General purpose output to ext. device (programmatically set)
Digital output	1× opto-isolated, 2–40 VDC, max. 185 mA
Digital I/O, isolation voltage	500 VRMS
Digital I/O, supply voltage	2–40 VDC, max. 200 mA
Digital I/O, connector type	12-pole M12 connector (shared with Digital synchronization and External power)



FLIR A65 f=13 mm with SC kit (7.5 Hz)

P/N: 62513-0102

© 2015, FLIR Systems, Inc.

#62513-0102; r. /26732; en-US

Digital input/output	
Synchronization in, purpose	Frame synchronization in to control camera
Synchronization in	1x, non-isolated
Synchronization in, type	LVC Buffer @3.3V, "0" <0.8 V, "1">2.0 V.
Synchronization out, purpose	Frame synchronization out to control another FLIR Ax5 camera
Synchronization out	1x, non-isolated
Synchronization out, type	LVC Buffer @ 3.3V, "0"=24 MA max, "1"= -24 mA max.
Digital synchronization, connector type	12-pole M12 connector (shared with Digital I/O and External power)
Power system	
External power operation	12/24 VDC, < 3.5 W nominal < 6.0 W absolute max.
External power, connector type	12-pole M12 connector (shared with Digital I/O and Digital Synchronization)
Voltage	Allowed range 10–30 VDC
Environmental data	
Operating temperature range	–15°C to +50°C (+5°F to +122°F)
Storage temperature range	–40°C to +70°C (–40°F to +158°F)
Humidity (operating and storage)	IEC 60068-2-30/24 h 95% relative humidity +25° C to +40°C (+77°F to +104°F)
EMC	<ul style="list-style-type: none">• EN 61000-6-2 (Immunity)• EN 61000-6-3 (Emission)• FCC 47 CFR Part 15 Class B (Emission)
Encapsulation	IP 40 (IEC 60529) with base support mounted
Shock	25 g (IEC 60068-2-27)
Vibration	2 g (IEC 60068-2-6)
Physical data	
Weight	0.200 kg (0.44 lb.)
Camera size (L × W × H)	106 × 40 × 43 mm (4.2 × 1.6 × 1.7 in.)
Tripod mounting	UNC ¼"-20 (on three sides)
Base mounting	4 × M3 thread mounting holes (bottom)
Housing material	Magnesium and aluminum
Shipping information	
Packaging, type	Cardboard box
List of contents	<ul style="list-style-type: none">• Hard transport case• Infrared camera with lens• Base support• Cable tie (2 ea.)• Ethernet cable CAT-6, 2m/6.6 ft (2 ea.)• FLIR ResearchIR Standard 4• Focus adjustment tool• Gooseneck• Mains cable kit (UK,EU,US)• PoE Injector (power over Ethernet)• Printed documentation• Table stand• User documentation CD-ROM
Packaging, weight	5.3 kg (11.7 lb.)



FLIR A65 f=13 mm with SC kit (7.5 Hz)

P/N: 62513-0102


© 2015, FLIR Systems, Inc.


#62513-0102; r. /26732; en-US

Shipping information	
Packaging, size	370 × 180 × 320 mm (14.6 × 7.1 × 12.6 in.)
EAN-13	7332558008492
UPC-12	845188008857
Country of origin	Sweden

Supplies & accessories:

- T951004ACC; Ethernet cable CAT-6, 2m/6.6 ft.
- T198349; Base support
- T198348; Cable kit Mains (UK,EU,US)
- T911112; PoE injector
- T198392; Table stand kit
- T911183; Gigabit PoE injector 16 W, with multi-plugs
- T127605ACC; Cable M12 Pigtail
- T127606ACC; Cable M12 Sync
- T198342ACC; Focus adjustment tool
- T198584; FLIR Tools
- T198583; FLIR Tools+ (license only)
- DSW-10000; FLIR IR Camera Player

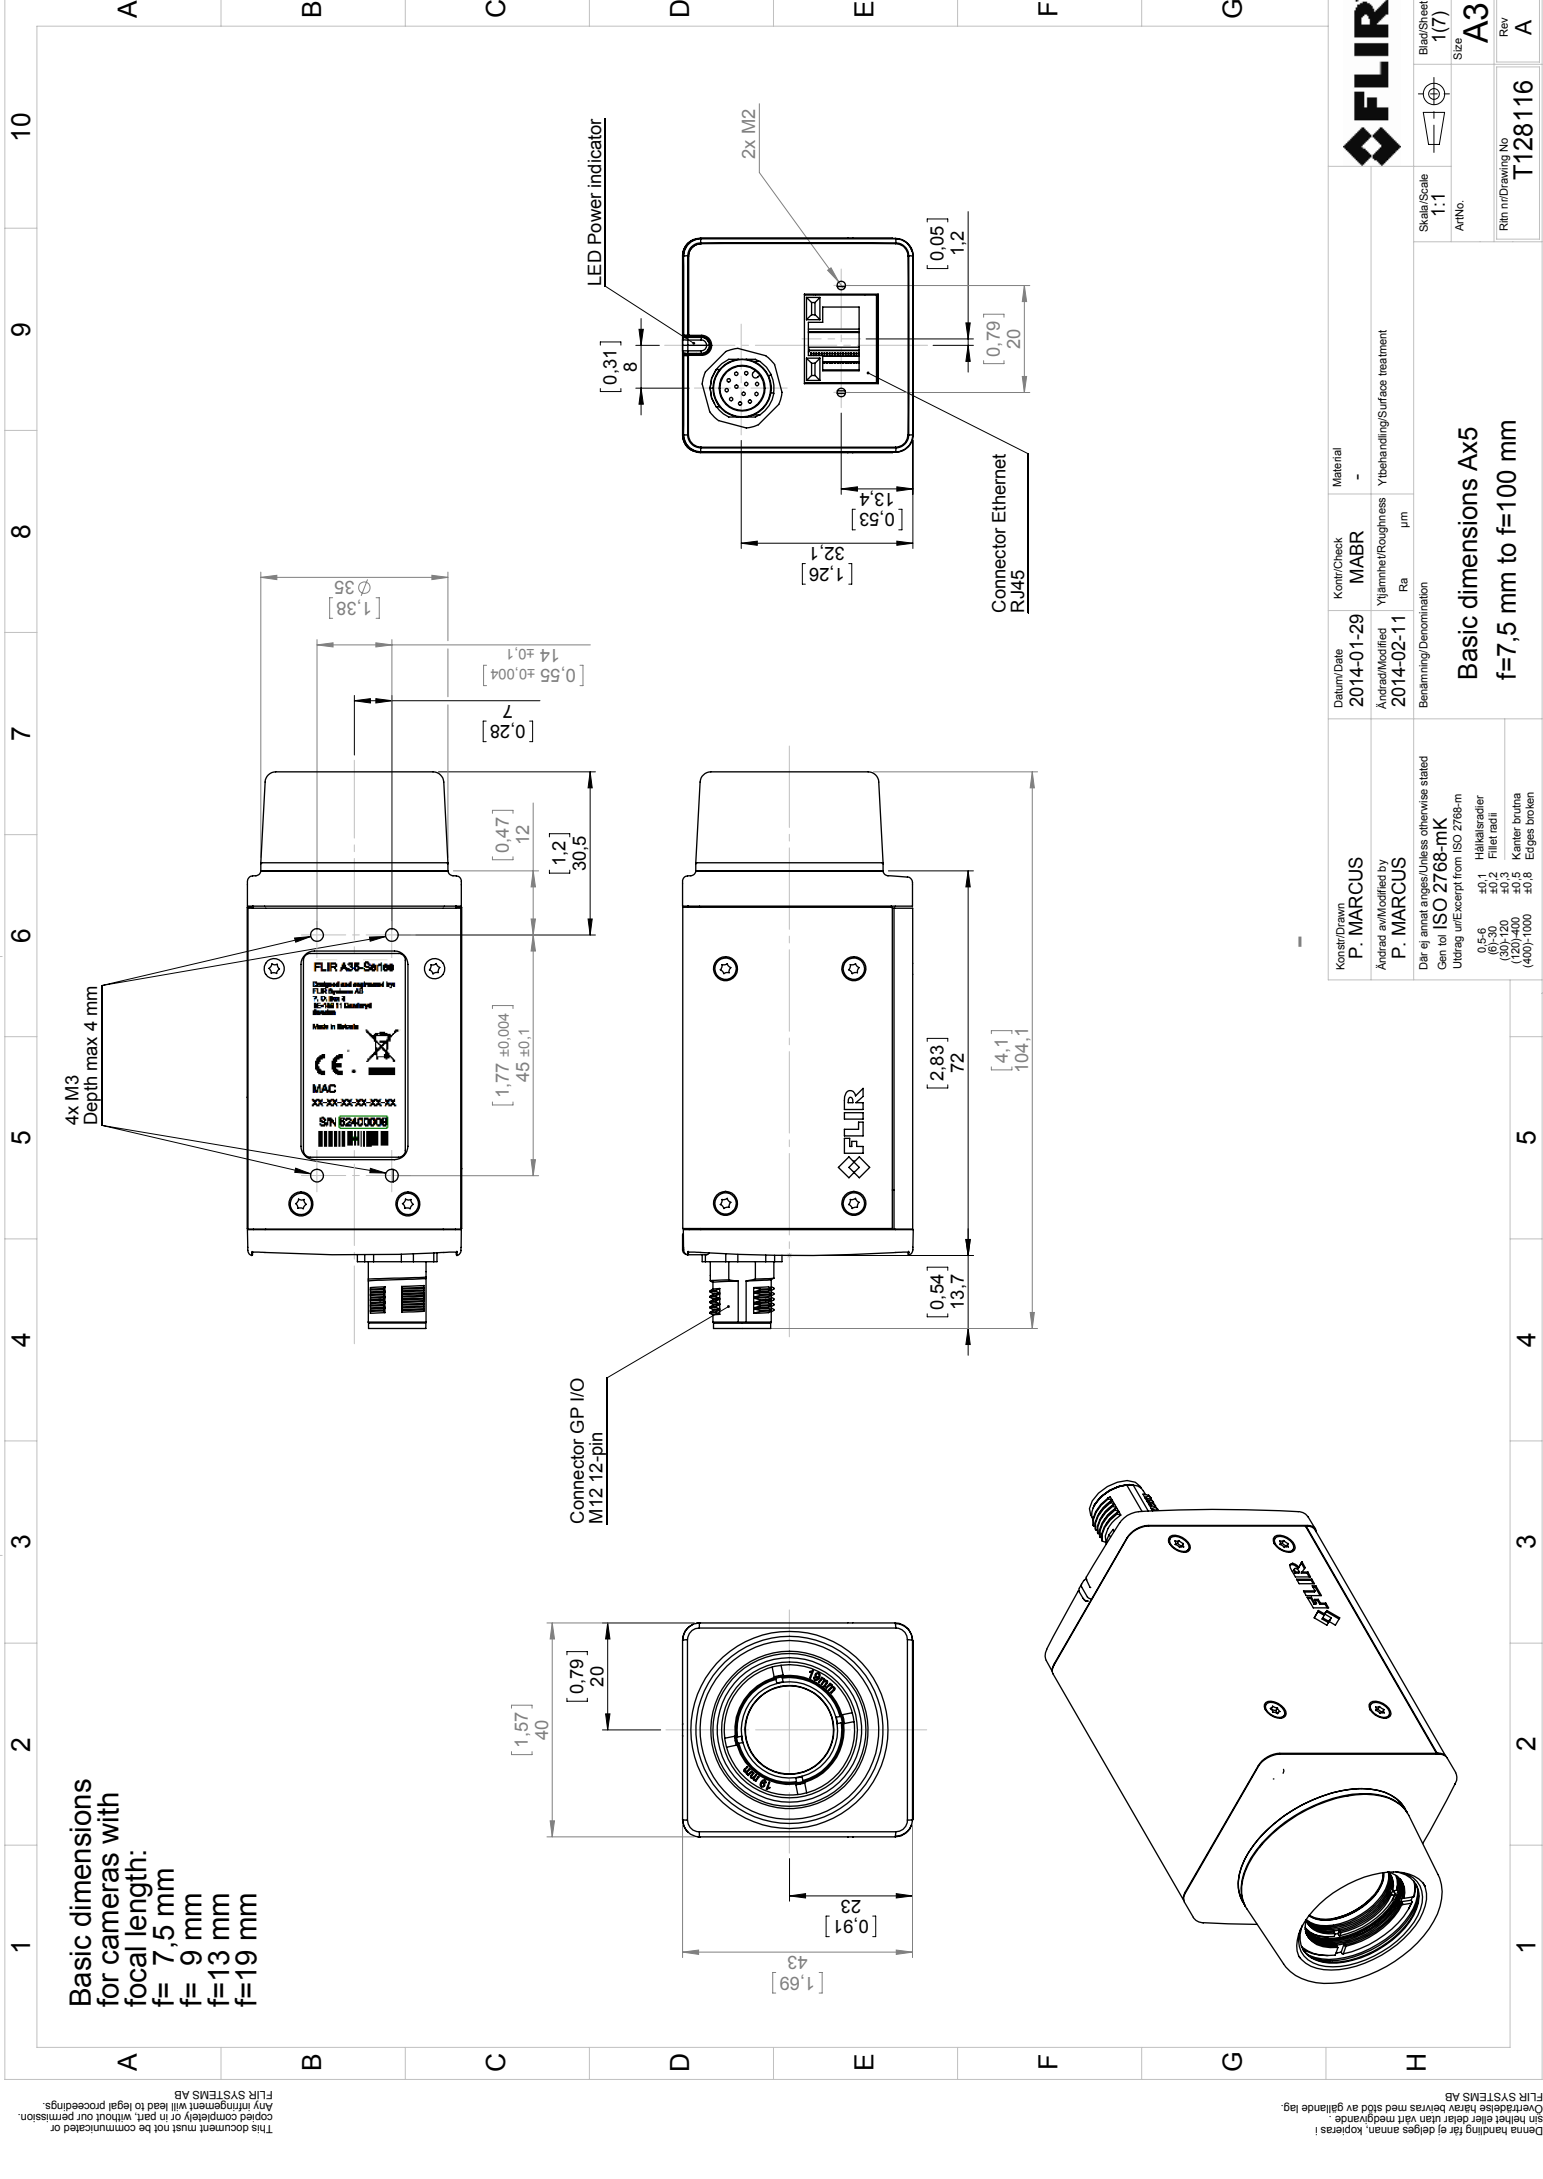[illegible][illegible]

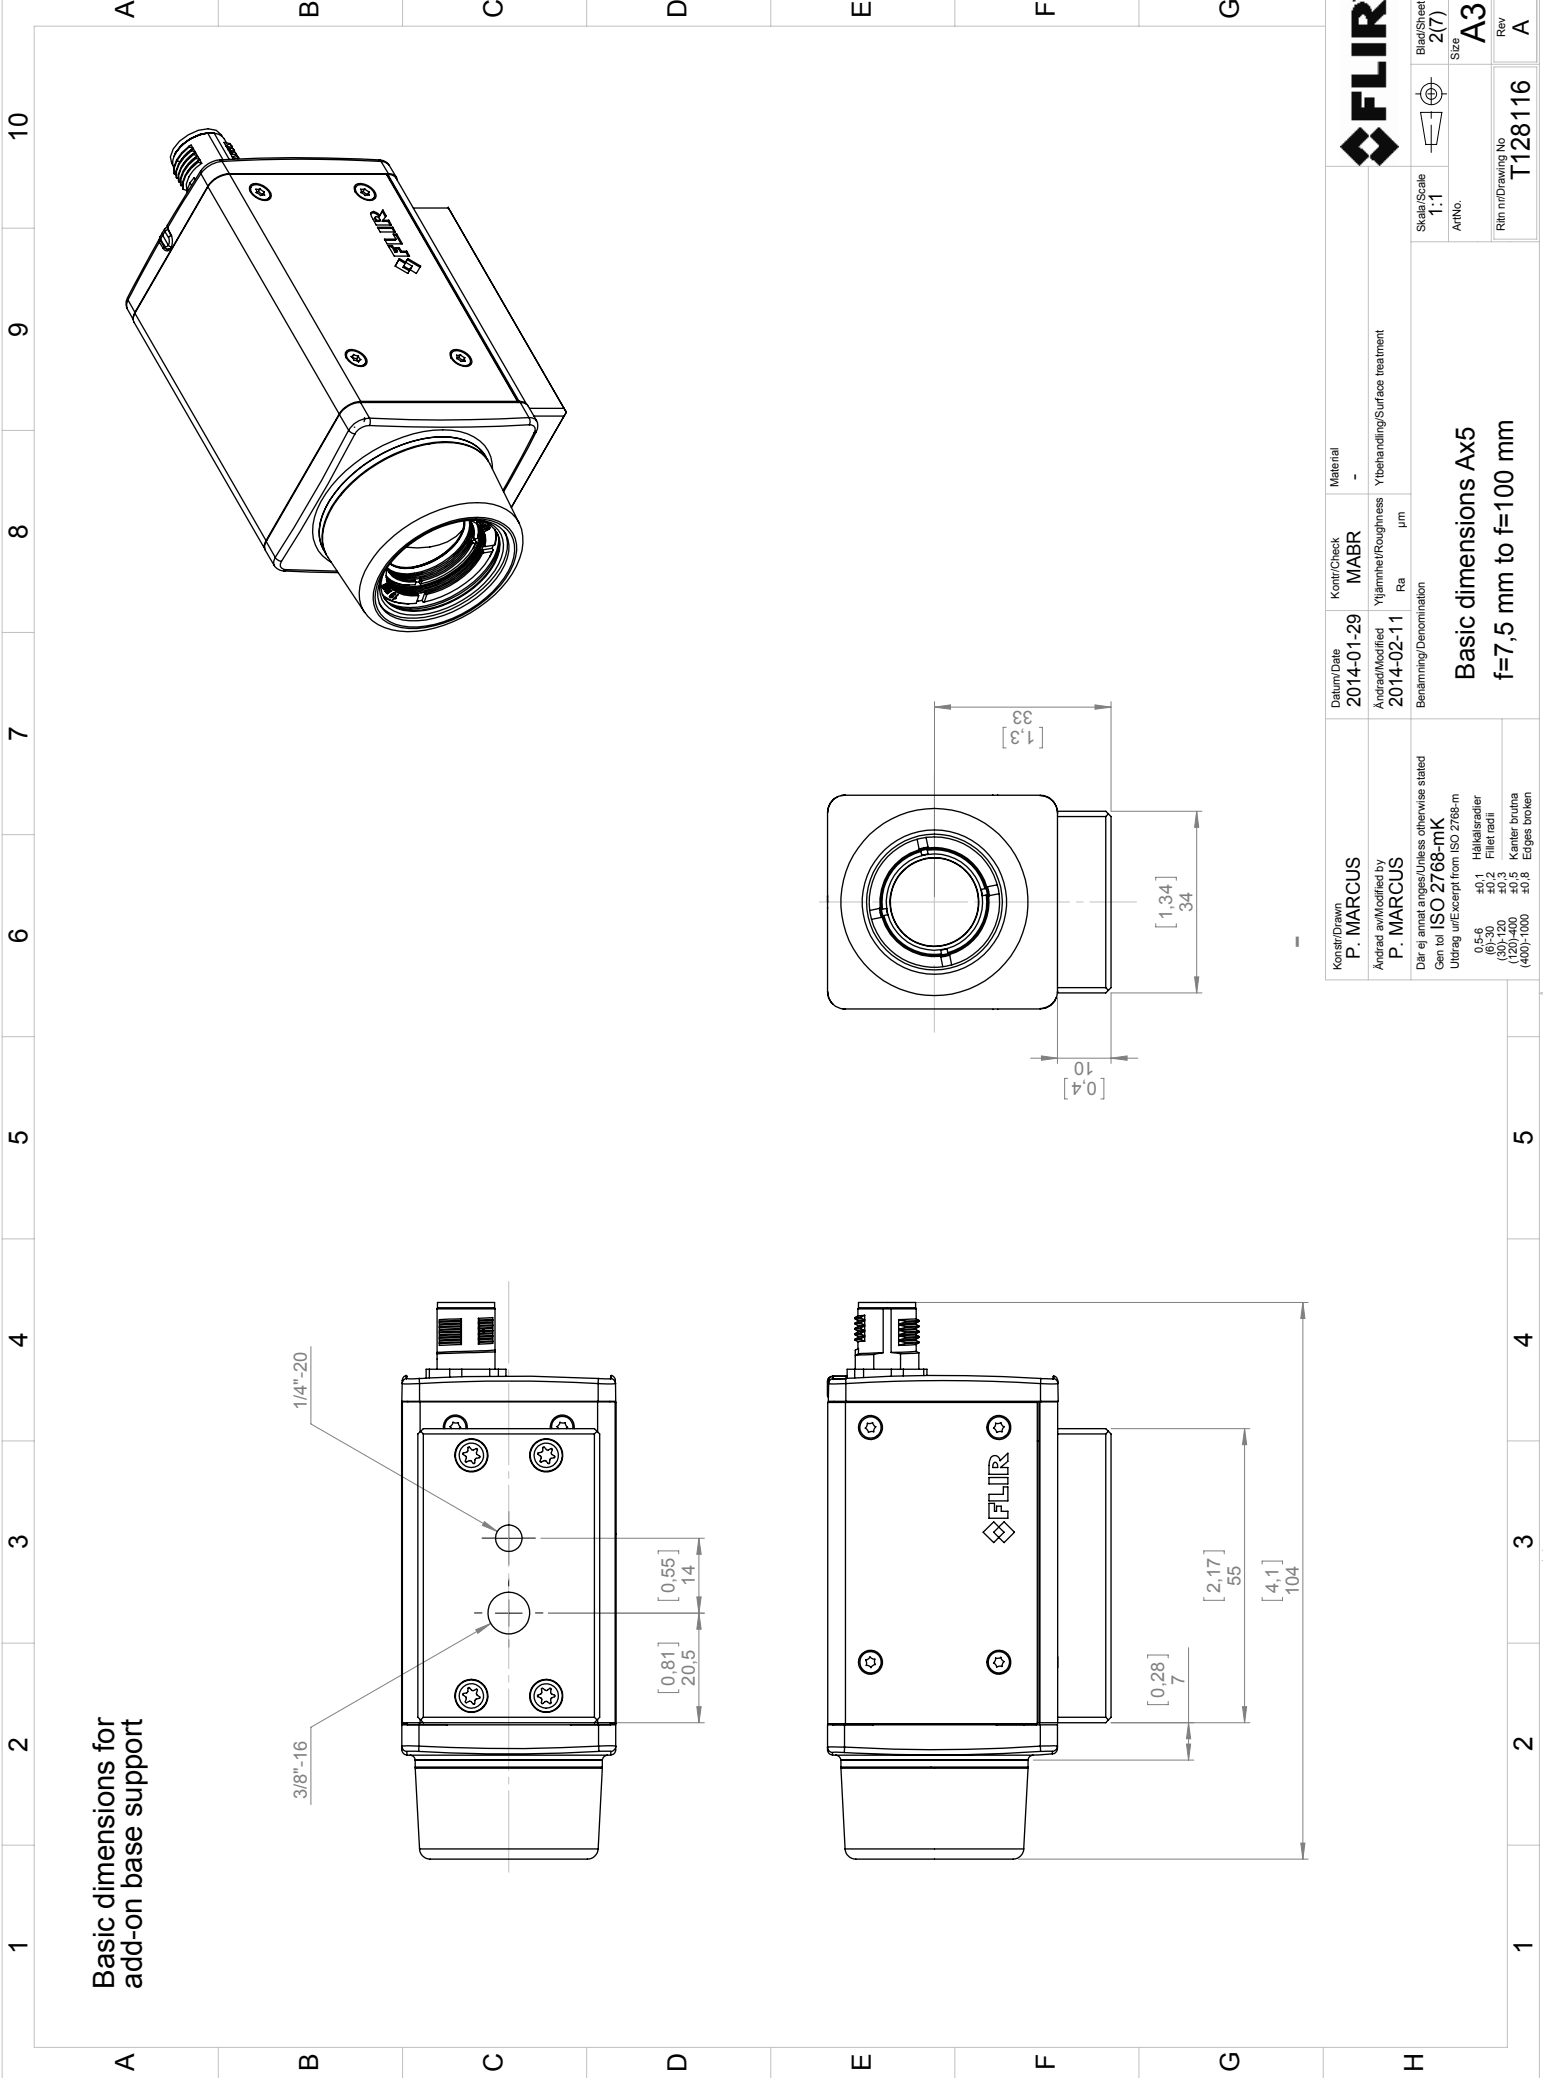






This document must not be communicated or copied completely or in part, without our permission.
FLIR SYSTEMS AB

Överförelse härav beivras med stöd av gällande lag.
FLIR SYSTEMS AB

Konstr/Drawn P. MARCUS		Datum/Date 2014-01-29	Kontr/Check MABR	Material -
Ändrad av/Modified by P. MARCUS		Ändrad/Modified 2014-02-11	Ytlämne/Roughness Ra	Ytbehandling/Surface treatment µm
Där ej annat anges/Unless otherwise stated Gen töl ISO 2768-mK Utmått ut/Excerpt from ISO 2768-m		Benämning/Denomination Basic dimensions Ax5 f=7,5 mm to f=100 mm		
0,5-6 ±0,1 Hållarsradier (6)-30 ±0,2 Fillet radii (120)-400 ±0,5 Kanter brutna (400)-1000 ±0,8 Edges broken		Skala/Scale 1:1		
		Blad/Sheet 2(7)		
		Rev A3		
		Ritning/Drawing No. T128116		





Basic dimensions:
Camera with focal length
f=25 mm IR lens.
Only dimensions valid for
this IR lens.
For all other dimensions see pages
1 and 2.

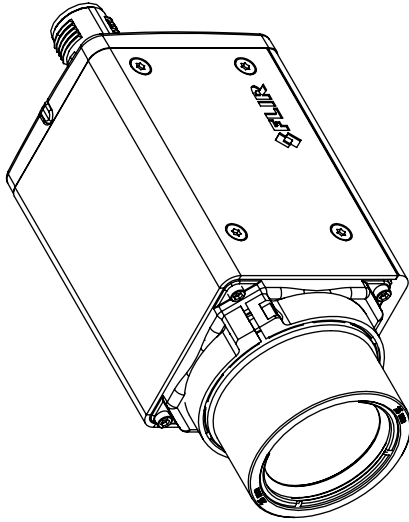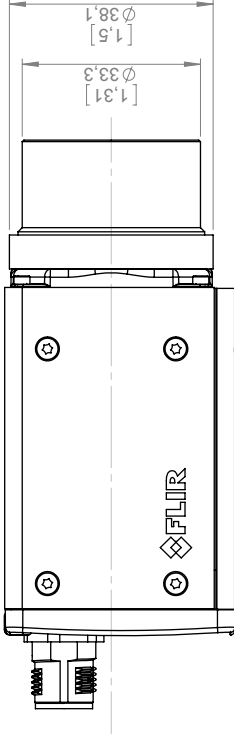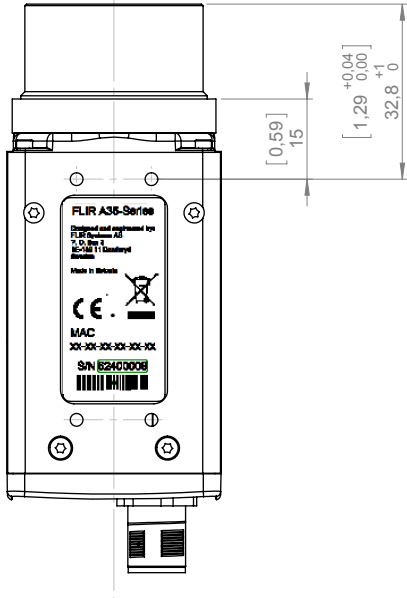


Konstr/Drawn P. MARCUS		Datum/Date 2014-01-29	Kontr/Check MABR	Material -	
Ändrad av/Modified by P. MARCUS		Ändrad/Modified 2014-02-11	Ytämhet/Roughness Ra	Ytbehandling/Surface treatment µm	
Där ej annat anges/Unless otherwise stated Gen töl ISO 2768-mk		Benämning/Denomination Basic dimensions Ax5 f=7,5 mm to f=100 mm			
Utdrag ur/Excerpt from ISO 2768-m		Skala/Scale 1:1			
0,5-6 ±0,1 Hållkäraradier (6)-30 ±0,2 Fillet radii (30)-120 ±0,3 (120)-400 ±0,5 Kanter brutna (400)-1000 ±0,8 Edges broken		Artno.			Blad/Sheet 3(7)
		Ritn nr/Drawing No T128116			Size A3
					Rev A

This document must not be copied completely or Any infringement will FLIR SYSTEMS AB

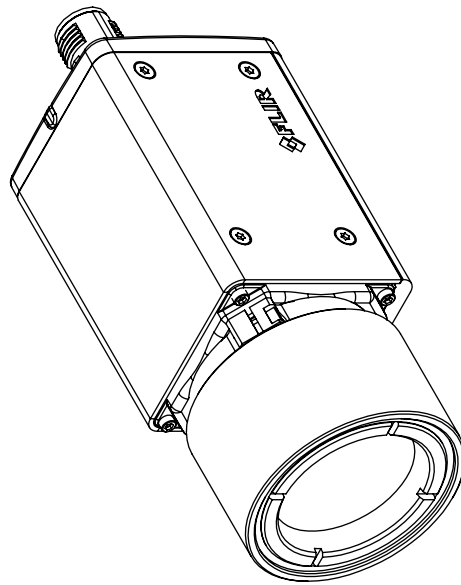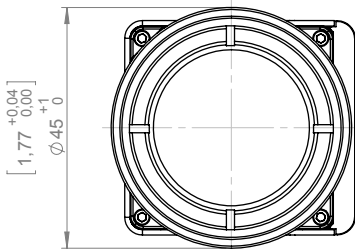

Denna handling får ej delges annan, kopieras i sin helhet eller delar utan vårt medgivande.
Övertäddelse härav beivras med stöd av gällande lag.
FLIR SYSTEMS AB

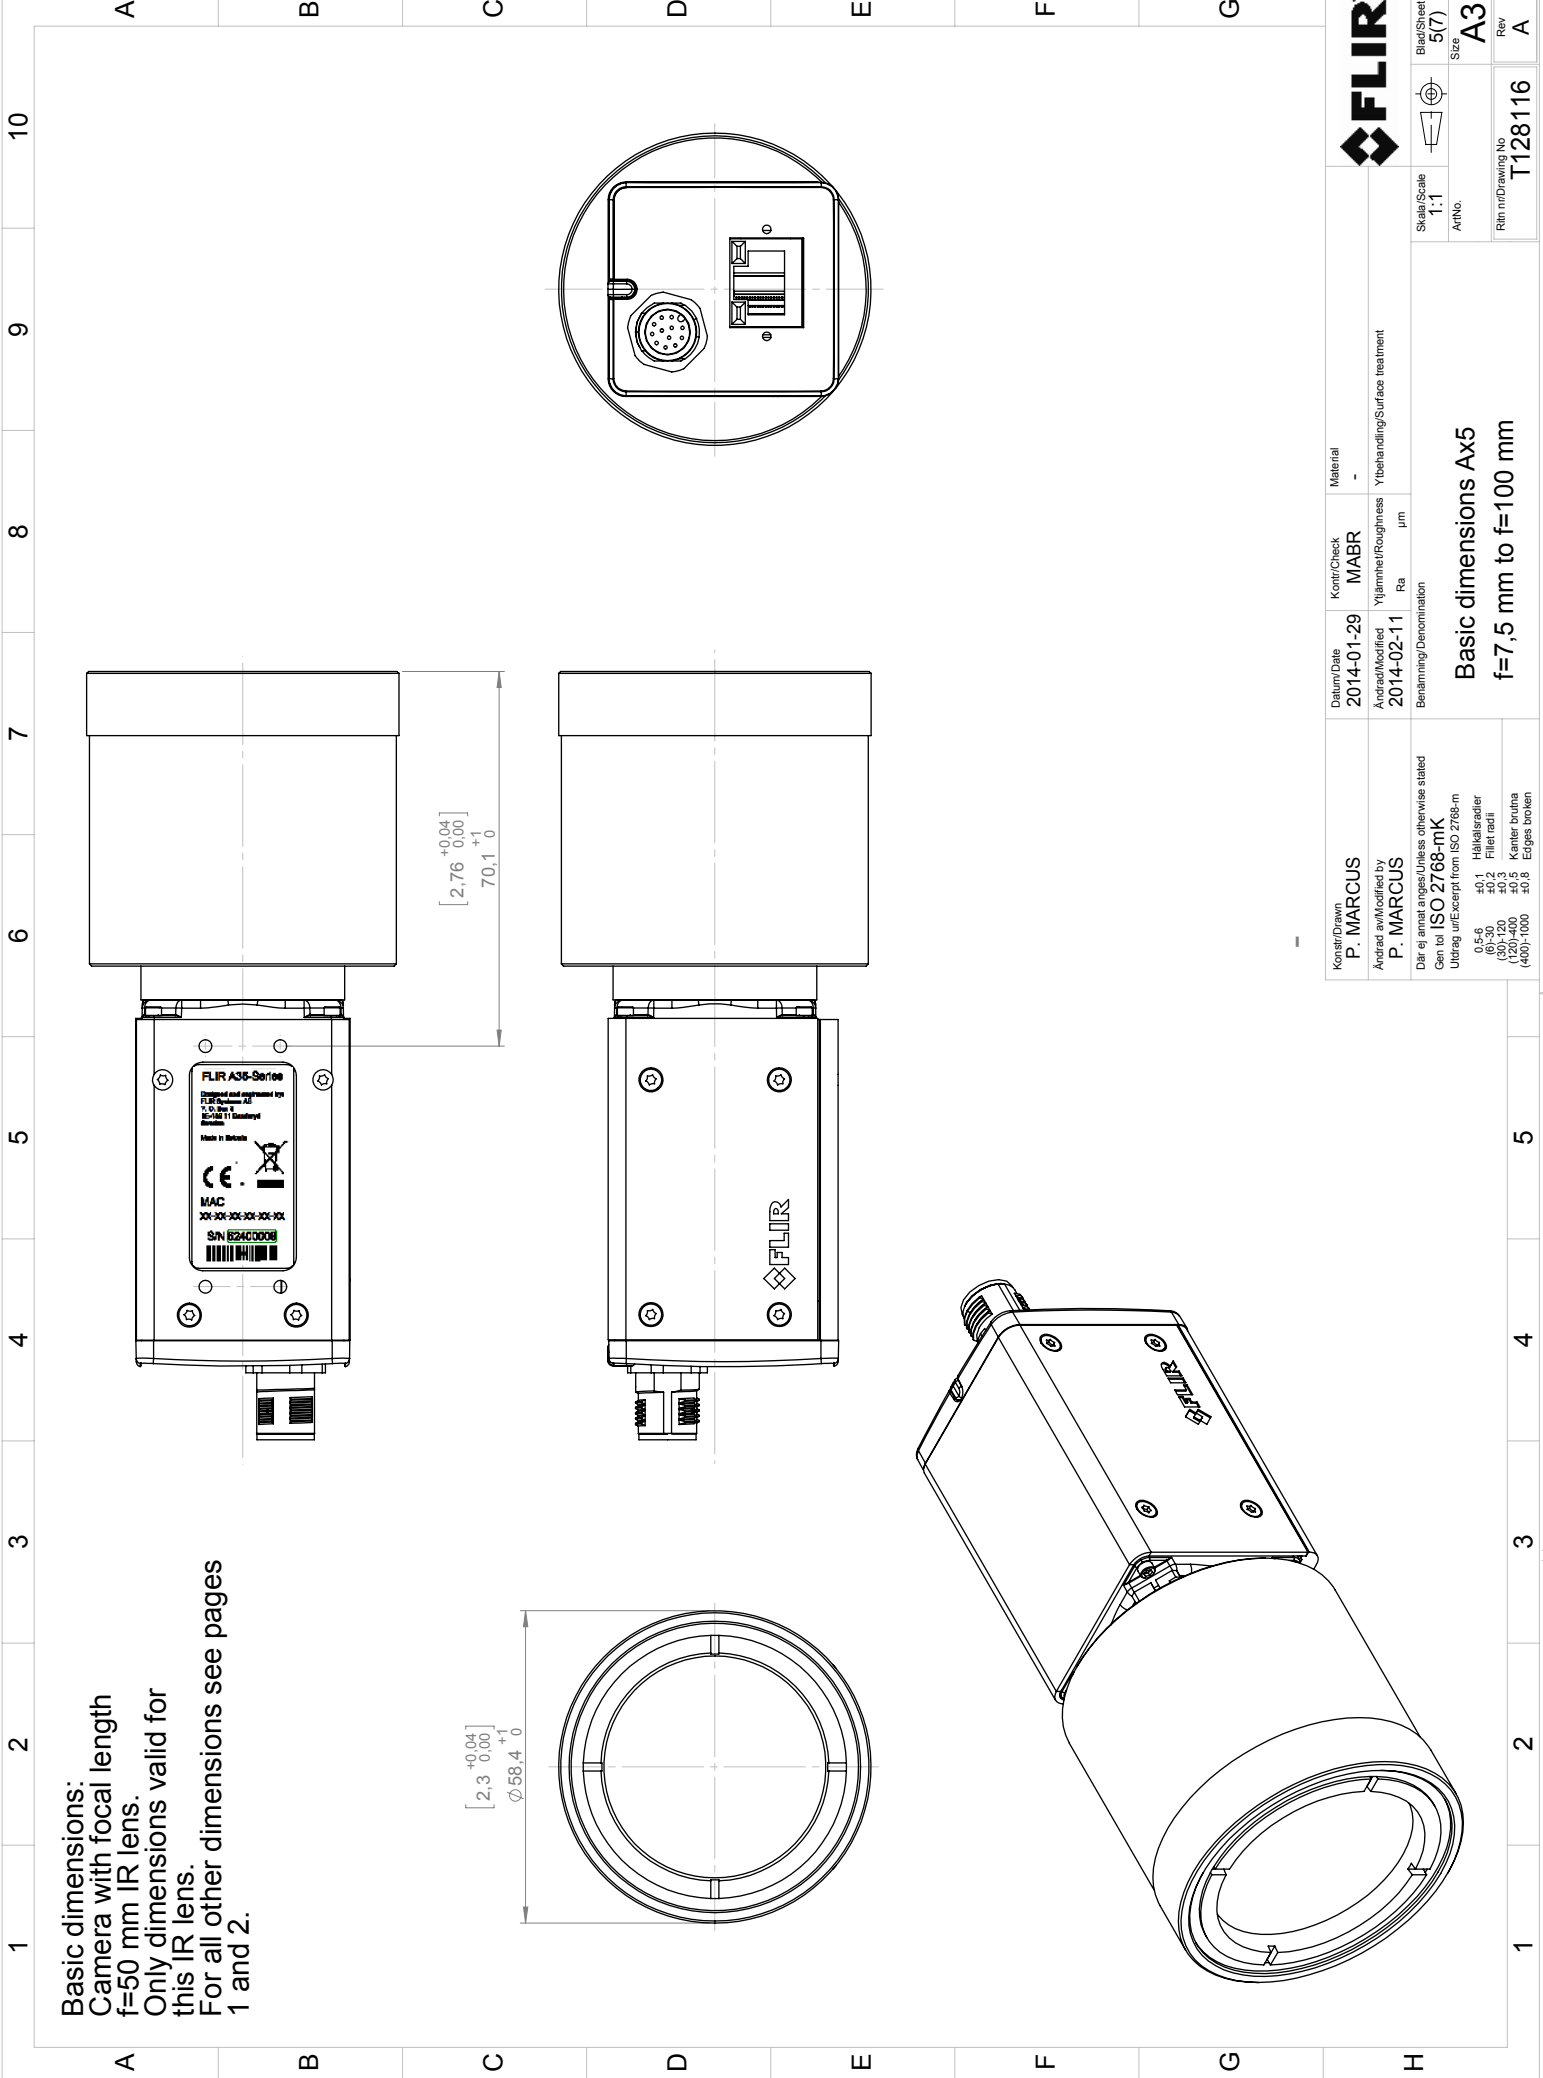


Basic dimensions:
Camera with focal length
f=50 mm IR lens.
Only dimensions valid for
this IR lens.
For all other dimensions see pages
1 and 2.

This document must not be communicated or
copied completely or in part, without our permission.
FLIR SYSTEMS AB

Denna handling är ett företagets ämne. Kopieras i
sin helhet eller delar utan vårt medgivande
övertas ansvar för felaktigheter.
FLIR SYSTEMS AB

Konstr/Drawn P. MARCUS		Datum/Date 2014-01-29	Kontroll/Check MABR	Material -
Ändrad av/Modified by P. MARCUS		Ändrad/Modified 2014-02-11	Ytjämnhet/Roughness Ra	Ytbehandling/Surface treatment µm
Där ej annat anges/Unless otherwise stated Utdrag ur/Excerpt from ISO 2768-m		Benämning/Denomination Basic dimensions Ax5 f=7,5 mm to f=100 mm		
0,5-6 6,3-30 30-120 120-400 (400)-1000		±0,1 ±0,1 ±0,2 ±0,5 ±0,8		
		Höjlsradier Fillet radii Kantlar brutna Edges broken		
		Skala/Scale 1:1		
		Blad/Sheet 5(7)		
		Rev A		
		Ritning/Drawing No. T128116		



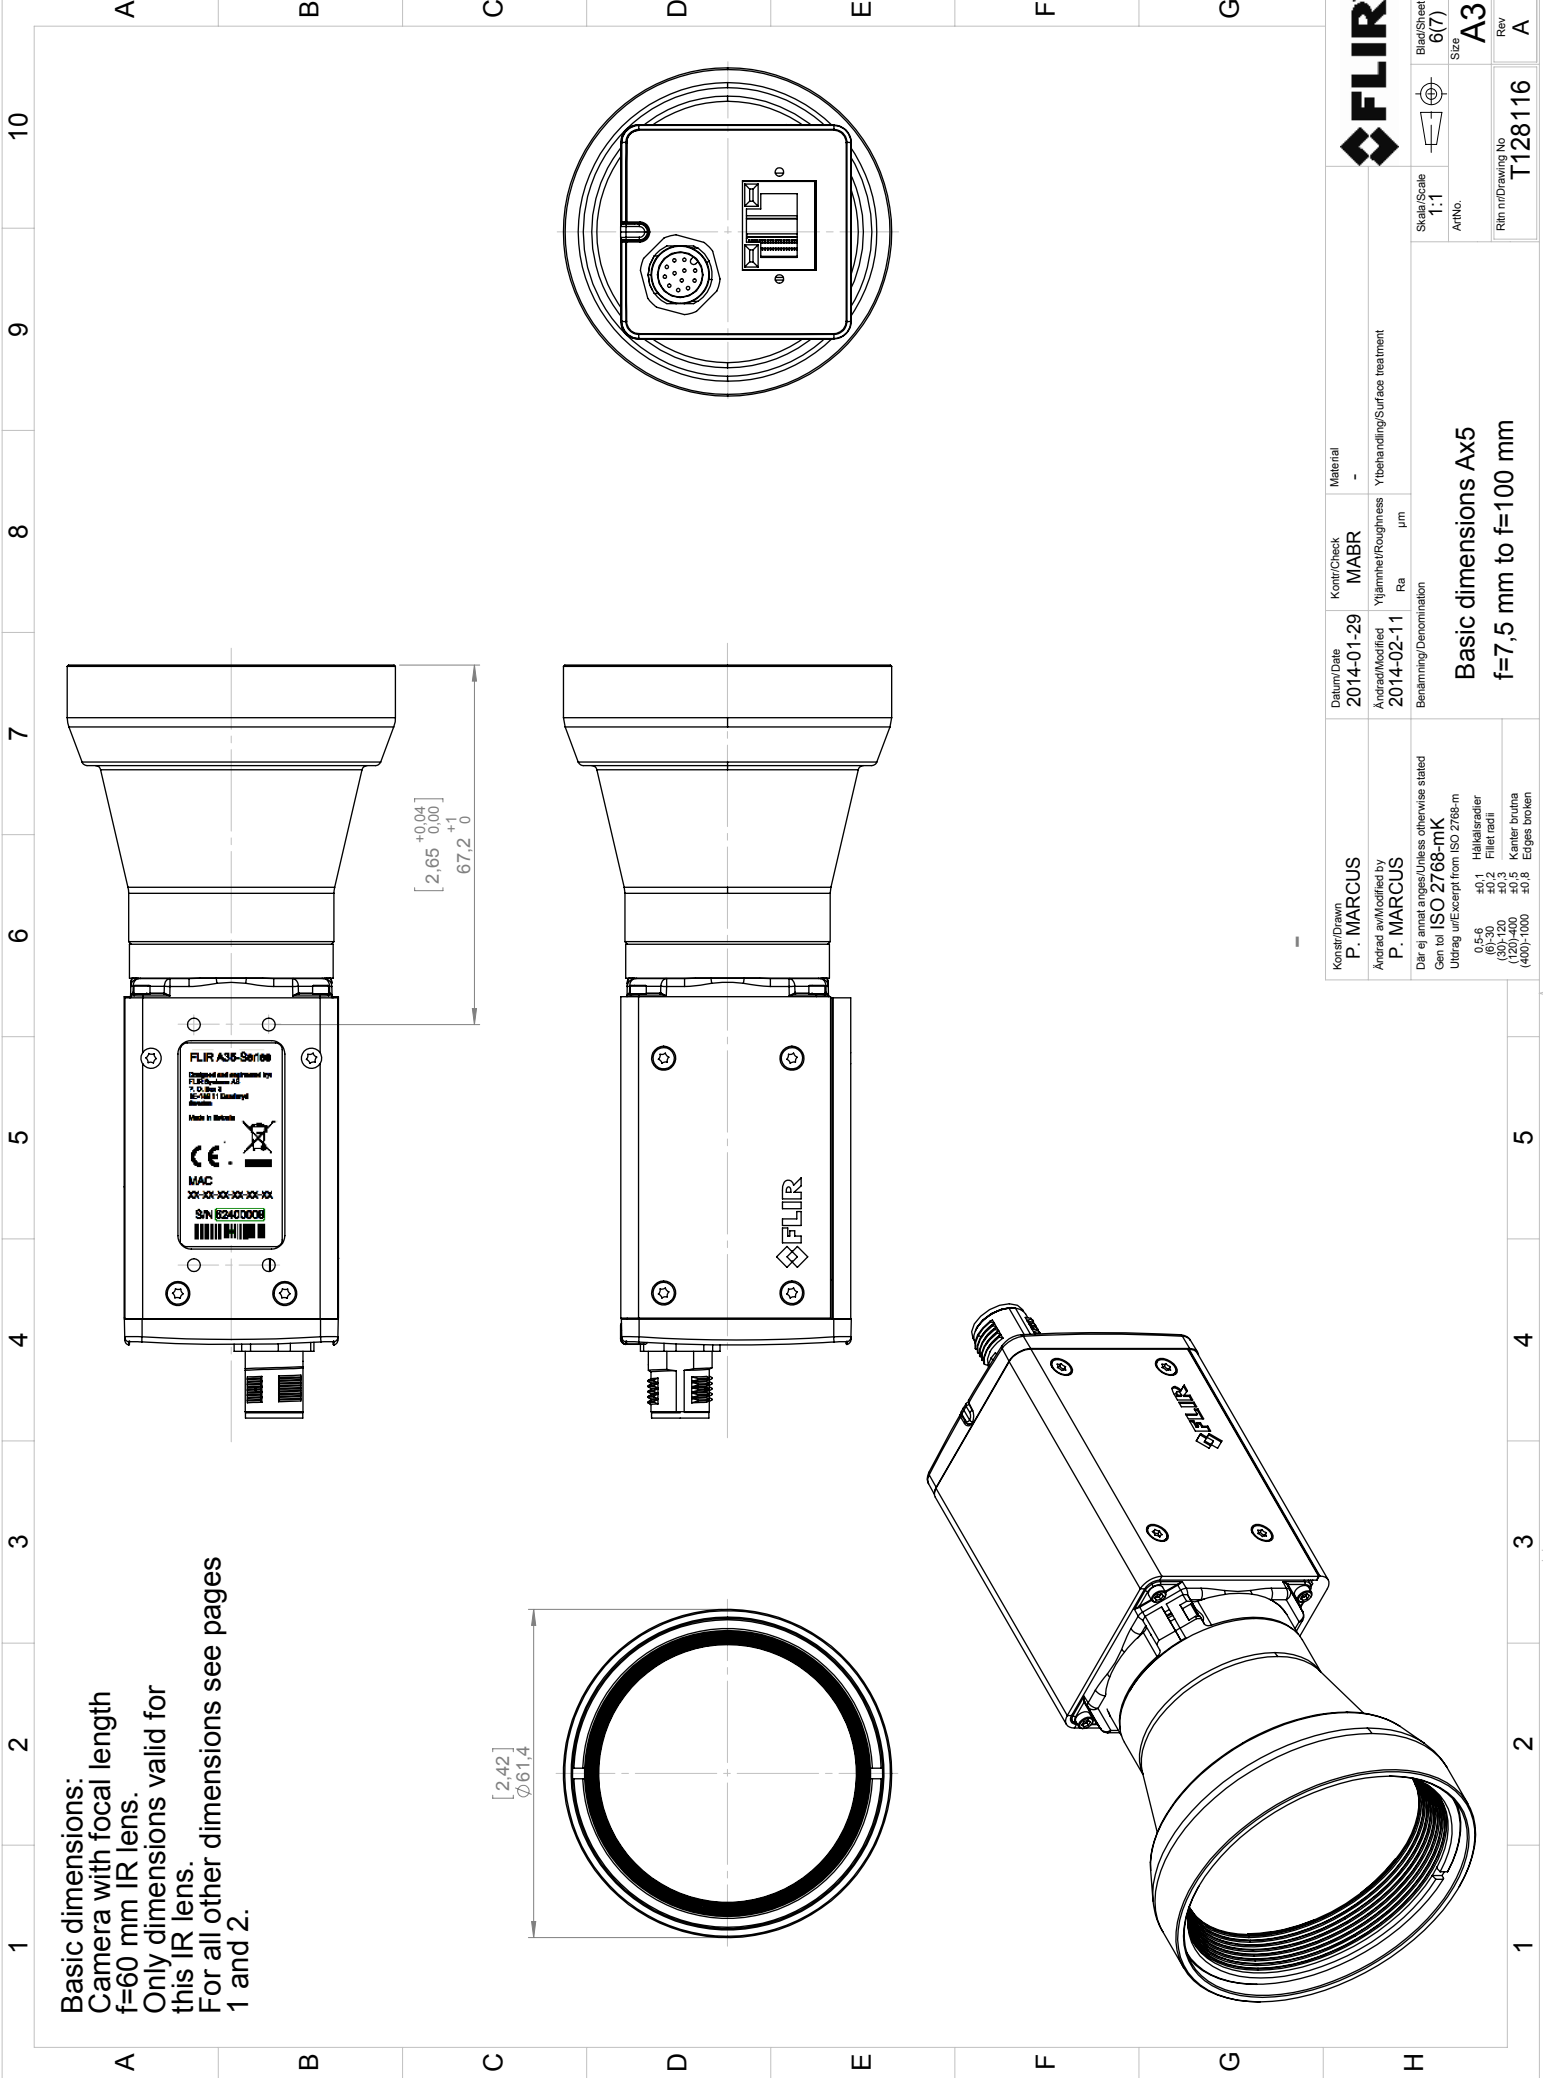

This document must not be communicated or copied completely or in part, without our permission. Any infringement will lead to legal proceedings.

FLIR SYSTEMS AB

Överträdelser härav beivras med stöd av gällande lag.

FLIR SYSTEMS AB

Den här handling är ett sådant sammanfattande utkast som behövs för att kunna utvärdera och godkänna en produkt eller tjänst utan att behöva teckna ett kontrakt.

Konstr/Drawn P. MARCUS		Datum/Date 2014-01-29	Kontr/Check MABR	Material -
Ändrad av/Modified by P. MARCUS		Ändrad/Modified 2014-02-11	Ytämne/Roughness Ra	Ytbehandling/Surface treatment µm
Där ej annat anges/Unless otherwise stated		Benämning/Denomination Basic dimensions Ax5 f=7,5 mm to f=100 mm		
Gen töl ISO 2768-mK		Utdrag ur/Excerpt from ISO 2768-m		
0,5-6		±0,1		
6,3-10		±0,2		
10-20		±0,3		
(120)-400		±0,5		
(400)-1000		±0,8		
		Hållarsradier Fillet radii		
		Kantlar brutna Edges broken		
		Skala/Scale 1:1		
		Artno. T128116		
		Blad/Sheet 6(7)		
		Rev A3		
		Rev A		



Basic dimensions:
Camera with focal length
f=100 mm IR lens.
Only dimensions valid for
this IR lens.
For all other dimensions see pages
1 and 2.

This document must not be communicated or
copied completely or in part, without our permission.
FLIR SYSTEMS AB







[1,48 ^{+0,04} _{0,00}]
37,5 0

[4,8 ^{+0,04} _{0,00}]
122 0


[3,23]
Ø 82

[2,68]
Ø 68

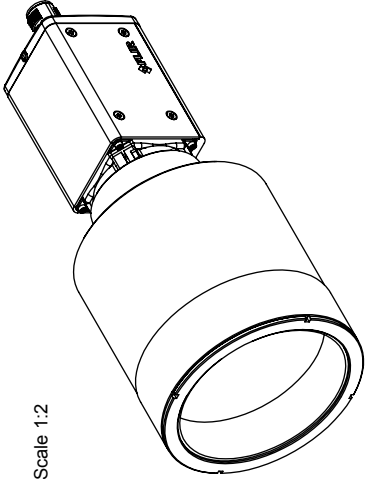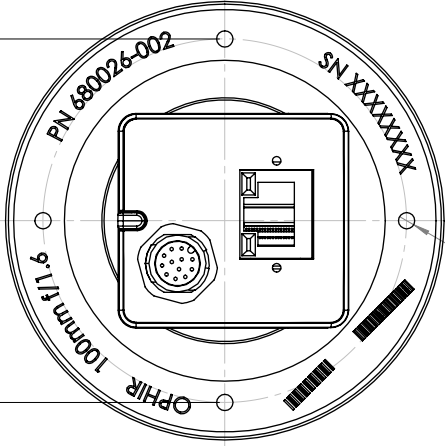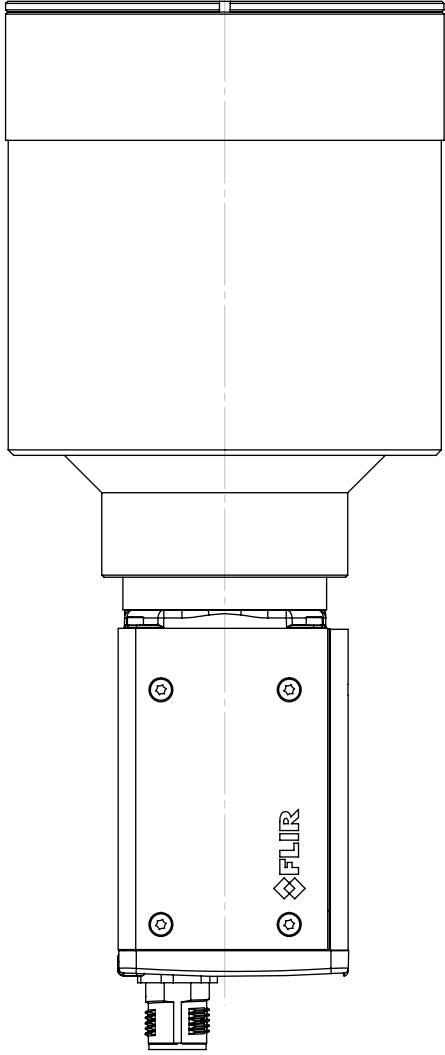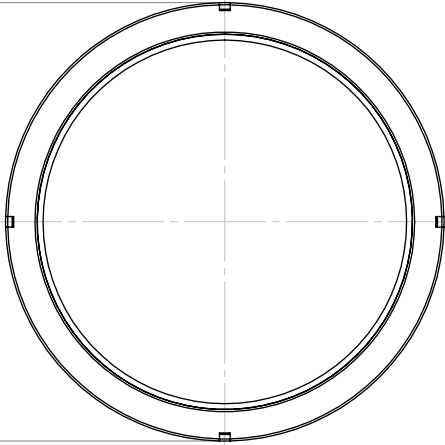

Scale 1:2

Konstr/Drawn P. MARCUS		Datum/Date 2014-01-29	Kontr/Check MABR	Material -
Ändrad av/Modified by P. MARCUS		Ändrad/Modified 2014-02-11	Ytlämne/Roughness Ra	Ytbehandling/Surface treatment
Där ej annat anges/Unless otherwise stated		Benämning/Denomination		
Utdrag ur/Excerpt from ISO 2768-m		Basic dimensions Ax5 f=7,5 mm to f=100 mm		
0,5-6 ±0,1 Hållarsradier (6)-30 ±0,2 Fillet radii (120)-400 ±0,5 Kanter brutna (400)-1000 ±0,8 Edges broken		Scale/Scale 1:1		
Blad/Sheet 7(7)		Artno. T128116		
Size A3		Rev A		



July 2, 2013

AQ320030

CE Declaration of Conformity

This is to certify that the System listed below have been designed and manufactured to meet the requirements, as applicable, of the following EU-Directives and corresponding harmonising standards. The systems consequently meet the requirements for the CE-mark.

Directives:


Directive 2004/108/EC;	Electromagnetic Compatibility
Directive 2006/95/EC;	"Low voltage Directive" (Power Supply)
Directive 2002/96/EC	Waste electrical and electronic equipment; WEEE (As applicable)

Standards:

Emission:	EN 61000-6-3; Electromagnetic Compatibility Generic standards - Emission
Immunity:	EN 61000-6-2; Electromagnetic Compatibility; Generic standards - Immunity
Safety (Power Supply):	EN 60950; (or other) Safety of information technology equipment

System: **FLIR AXX series**

FLIR Systems AB
Quality Assurance



Björn Svensson
Director